


# TECHNICAL DATA SHEET

## Cool Touch Thermostatic Shower Mixer With Riser Rail Kit

<b>Barcode</b>	-
<b>Product Code</b>	VESK-65-xxx
<b>Construction</b>	Valve: High Performance Polyamide (PPA) Body & SS201 Stainless steel Casing; SS201 Stainless steel Riser rail & Base plates; Zinc-alloy Handles
<b>Finishes</b>	Chrome plated to BS EN 248
<b>Product Type</b>	Contemporary
<b>Water Pressure</b>	Min. 0.2 bar (handset) 0.5 bar (shower head), Max. 6.0 bar
<b>Plumbing Systems</b>	Suitable for all plumbing systems, Hot and Cold water pressure preferably balanced Max. supply pressure differential requirement no greater than 5:1
<b>Standards</b>	Complies with BSEN 1111
<b>Certification</b>	WRAS approved and certified
<b>Cartridge</b>	WANHAI Thermostatic cartridge & Integrated Ceramic disc valve diverter
<b>Check valve</b>	DN15 check valve (0.5-10 gpm)
<b>Fitting</b>	SS304 S-Union connectors (Male thread offset 1/2 inch x 3/4" BSP with Escutcheon); Brass G1/2" BSP Male bottom outlet & G3/4" BSP Male upper outlet connection
<b>Packaging</b>	93 x 43.5 x 36cm / carton (4 boxes), Dimension: 91 x 42 x 8.5cm / box
<b>Guarantee</b>	10 years against manufacturing faults (excluding serviceable parts)
<b>Additional Information</b>	<ol style="list-style-type: none"> <li>1. Temperature: Pre-set 38°C, with push button override to 48°C</li> <li>2. Automatic shut off in the event of hot or cold water supply failure</li> <li>3. COOL TOUCH Bar Valve technology</li> <li>4. Ultra Slim Shower head : Chrome , SS304 , Ø200mm , easy clean rubber nozzles</li> <li>5. Shower handset : Chrome , ABS , 3 modes , rubber nozzles , G1/2" BSP</li> <li>6. Handset holder : Chrome , ABS , adjustable height</li> <li>7. Shower hose : Chrome , SS304 double interlock , 1.5m , Large Ø11mm bore</li> <li>8. Riser rail : Chrome , SS201 Stainless steel , telescopic adjustable height</li> </ol>

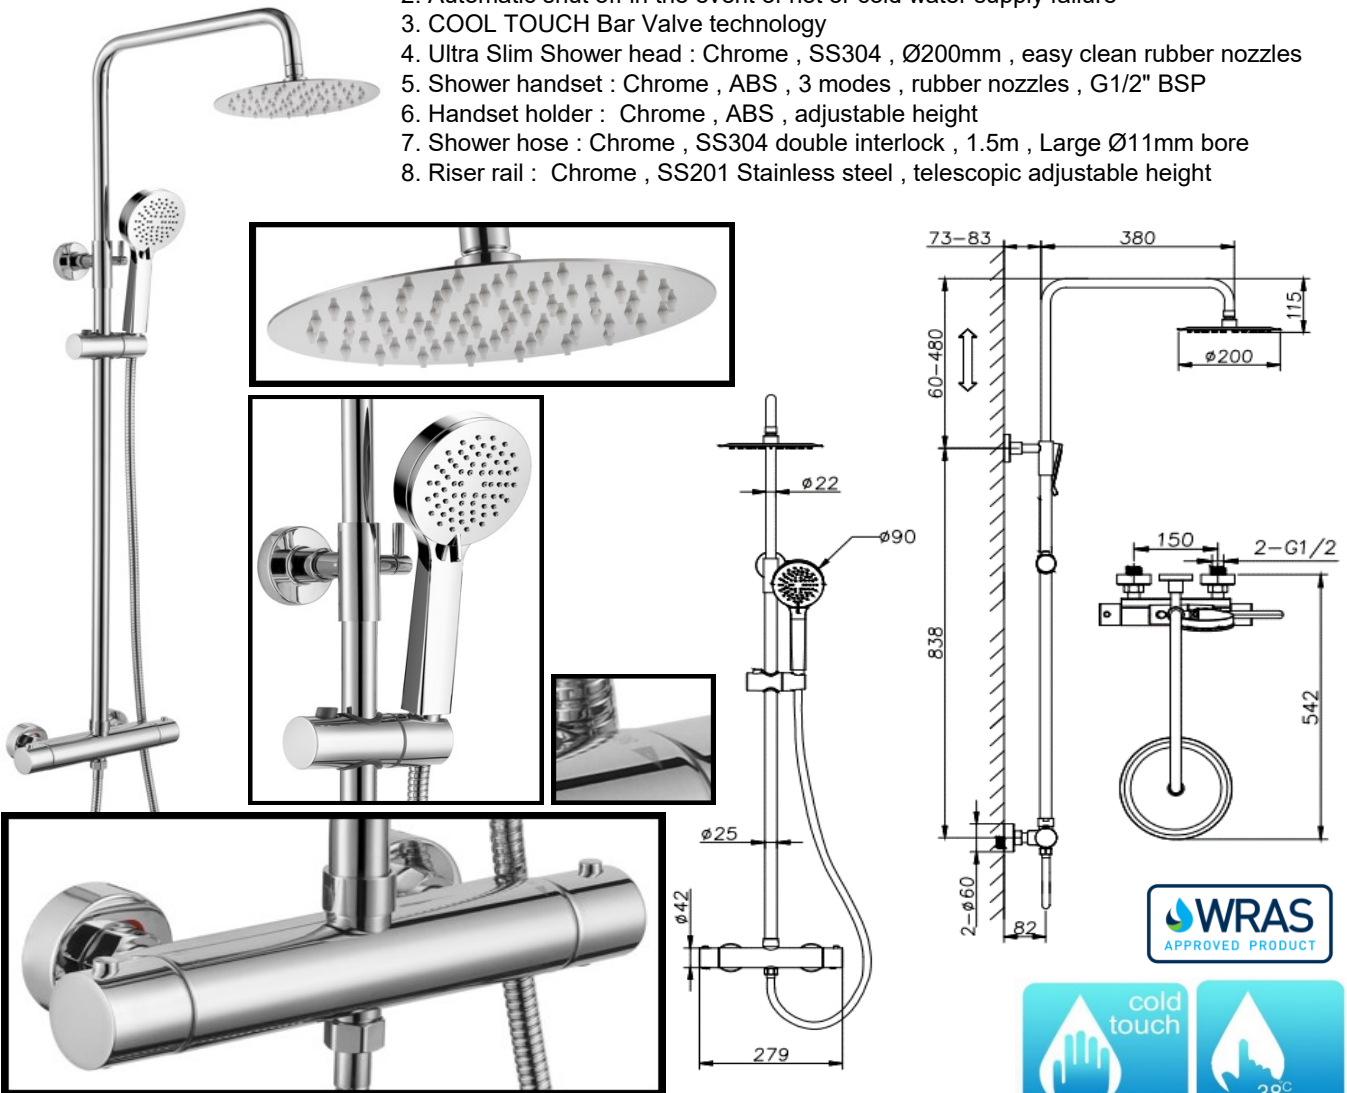

### Flow Rates (Litres per minute)

System Pressure	0.1 Bar	0.2 Bar	0.3 Bar	0.5 Bar	1.0 Bar	1.5 Bar	2.0 Bar	3.0 Bar	4.0 Bar	5.0 Bar
VM107ACR	4.5	6.5	8.1	10.6	15.2	-	-	-	-	-

The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice.

